



# 515



## Ultra Dura Synthetic FG Compressor Oil

- *Ultra-long oil service life unmatched by other synthetic food grade compressor oils*
  - *Superb thermo-oxidative & hydrolytic stability*
  - *Excellent resistance to wear, corrosion, emulsification & foaming*
  - *Low volatility – minimal evaporation loss*
  - *Excellent compatibility with elastomers and/or sealing materials*
- NSF H-1 Registered*

TRUST Save Money  
OMEGA Enhance Performance  
TO Extend Service Life



Nonfood Compounds Program Listed  
Category Code : H1  
Registration Number : 150297

MAGNA INDUSTRIAL CO. LIMITED  
Total Quality Maintenance

OMEGA 515 Ultra Dura Synthetic FG Compressor Oil

## SPECIAL FEATURES

**OMEGA 515 Ultra Dura Synthetic FG Compressor Oil** is blended with dual synthetic base fluids including Alkylated Naphthalene (AN) to satisfy maintenance professionals' needs of ultra-durable compressor oil in the food & beverage processing industry.

- **OMEGA 515** offers ultra-long service life exceeding most OEM's demanding requirements. Under normal operating conditions, it performs effectively up to 16,000 hours (sixteen thousand hours or over 2 to 3 times as long as most other synthetic food grade compressor oils).
- With superb thermo-oxidative & hydrolytic stability, **OMEGA 515** performs reliably at high temperatures and in humid conditions, while other compressor oils deteriorate prematurely and form harmful contaminants such as carbon deposits and corrosive acids.

## OUTSTANDING PROPERTIES


**OMEGA 515 Ultra Dura Synthetic FG Compressor Oil** is quality engineered to resolve maintenance problems associated with the operation of compressors in the food & beverage industry.

- **OMEGA 515** is fortified with Omega's proprietary package of additives to provide extra-protection against wear, corrosion, emulsification and foaming.
- **OMEGA 515** is compatible with most elastomers and/or sealing materials to reduce the risk of oil leakage due to seal deformation.
- **OMEGA 515** is low in volatility, minimizing oil loss due to evaporation.
- **OMEGA 515** is NSF H-1 listed for incidental contact with food.

## USE FOR

**OMEGA 515** ultimately reduces overall maintenance cost with extended re-lubrication interval, reduced level of contamination, and optimized oil consumption rate.

- Use **OMEGA 515** on oil-lubricated centrifugal and positive displacement compressors, especially reciprocating types, in the food and beverage processing industry.
- **OMEGA 515** can also be used on vacuum pumps.
- When and prior to applying **OMEGA 515**, follow equipment manufacturers' instructions.

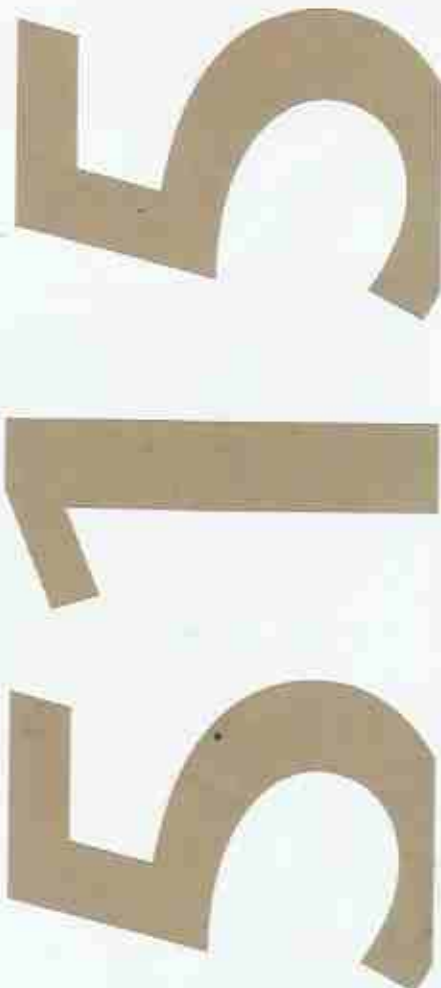

**Omega**

*The Ultimate Lubricant*

Magna Industrial reserves the right to modify or change this product for purposes of improving its performance characteristics.  
© 2014 Magna Industrial Co. Limited

The Omega trade mark is the property of ITW, Inc., and is used under licence by Magna Industrial Co. Limited

**MAGNA INDUSTRIAL CO. LIMITED**  
*Total Quality Maintenance*

The information contained in this publication supersedes all relevant information previously released and is to the best of our knowledge and accurate at the time of issue in October, 2014